



YF-30UL CUTTER-HEADS

Specially designed for excavator installation, used for contour milling
A multifunctional equipment that integrates milling, roughening, cleaning, and profiling.

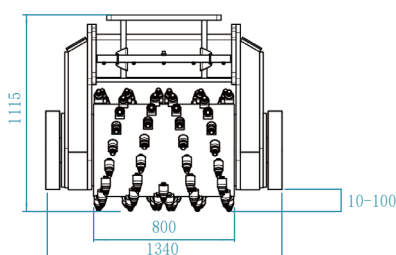


EXCAVATOR

20-40 ton

PRODUCT APPLICATIONS

1. Resurfacing tunnel roofs and walls
2. Profiling of high-speed railway box girders
3. Surface roughening or profiling of concrete embankment
4. Removing of Asphalt pavement cracking and potholes
5. Surface roughening of original road surface before laying new ones
6. Removal of surface coatings on industrial plant floors



Adaptive attachment
(optional)
allows the cutting head perfectly
following the contour of surface
to be milled while working

PRODUCT PARAMETER (SPECIFICATION)

Max Power Output	105 kW	Output Torque	17795 Nm@315bar
Max Flow	320 LPM	Output Shaft Speed	56-85 RPM
Recommended Flow	200-300 LPM	Weight	2100 kgs
Pressure	315 bar	Cutter Bit	68 个
Cutting Depth	10-100mm (adjusted by replacing the lateral wheels)		

Note: If oil specification is below 46 centistokes at 40 °C (ISO HV46) the performance must be down rated. Please contact YICHEN for further information.



APPLICATIONS



Tunneling



Utility Work



Roadworks



Mining



Excavation



Structure-Shaping

*The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice.