
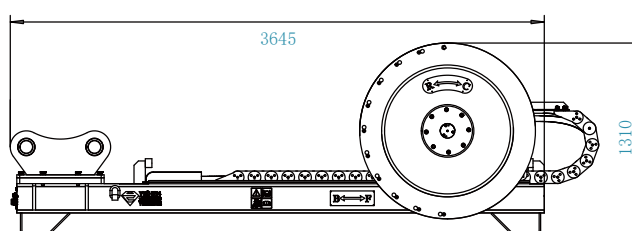
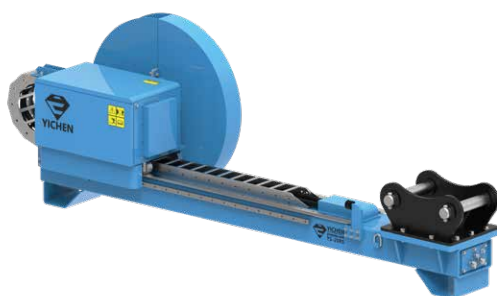



# YS-20RS

YS-30DS YS-20SS YS-05SS YS-20TS  
YS-20DS YS-15SS YS-02SS  
YS-25SS YS-10SS **YS-20RS**

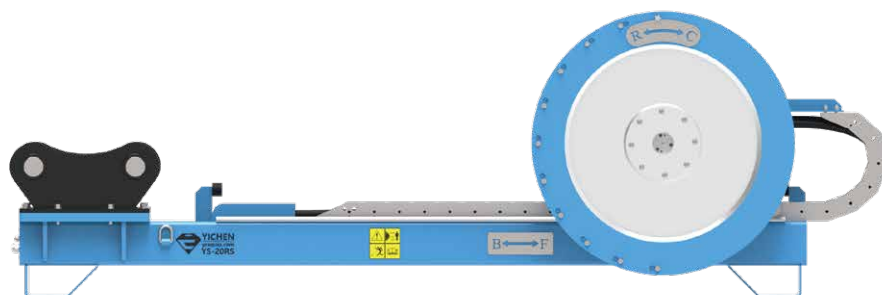

## EXCAVATOR

# 20-45<sub>ton</sub>

### PRODUCT APPLICATIONS

- Building demolition
- Cutting reinforced concrete
- Excavation of foundation, rock and concrete of basement.
- Underground cable trench cutting operation.
- Quarry excavation operations,
- Rock waste reshaping, cutting and other operations.

### PRODUCT PARAMETER (SPECIFICATION)

Max Power Output	120 kW	Output Shaft Speed	0- 450 RPM
Max Flow	350 LPM	Weight	1050 kgs
Recommended Flow	180-320 LPM	Saw Blade spec.	Φ 11.8 mm
Max Pressure	315 bar		1600 mm
Output Torque	3990 Nm@315bar	Applicable Materials	granite, basalt, marble, reinforced concrete

**Note:** The rock saw can work with any hydraulic driven mechanical equipment.



### APPLICATIONS



Demolition



Tunneling



Stone Production



Roadworks



Quarries



Trenching



Metal cutting

\*The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice.