

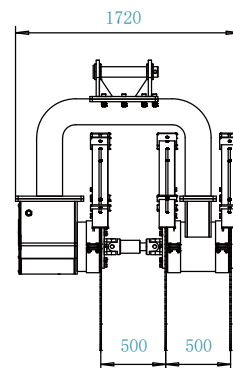


YS-20TS

YS-30DS	YS-20SS	YS-05SS	YS-20TS
YS-20DS	YS-15SS	YS-02SS	
YS-25SS	YS-10SS	YS-20RS	



EXCAVATOR

20-45_{ton}

PRODUCT APPLICATIONS

- Building demolition
- Cutting reinforced concrete, cement pavement
- Excavation of foundation, rock and concrete of basement.
- Underground cable trench cutting operation.
- Quarry excavation operations,
- Rock waste reshaping, cutting and other operations.
- Rocky tunnel or trench excavation

PRODUCT PARAMETER (SPECIFICATION)

Max Power Output	125 kW	Output Shaft Speed	375rpm@300Lpm
Max Flow	320 LPM	Weight	2000 kgs
Recommended Flow	200-300 LPM	Saw Blade spec.	Φ 1600 mm
Max Pressure	315 bar	Applicable Materials	granite, basalt, marble, reinforced concrete
Output Torque	4032 Nm@300bar		

Note: The rock saw can cut aluminum and reinforced concrete by changing different specifications of saw blades.
The rock saw can work with any hydraulic driven mechanical equipment.
between the blades is 50-200mm. Saw blade cover can be installed 360° freely.



APPLICATIONS



Demolition



Tunneling



Stone Production



Roadworks



Quarries



Trenching



Metal cutting

*The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice.